


## Active Target Adapter for the DynaSight™ Sensor



Size:	3.8 cm x 6.9 cm x 14.9 cm
Maximum Targets:	4
Indicator Light:	Visible Red/Green LED for Sync Status
Synchronization Interface:	BNC Cable (10 foot Coaxial Cable is supplied)
Target Interface:	8-Pin Mini-DIN Connector (for 4 Twisted Pairs)
Power requirements:	9 VDC at 300 milliamperes (Wall transformer for 120 VAC is supplied)

The Active Target Adapter comes with a factory-cabled triangular array of three active targets for turn-key applications in 6-DOF sensing, and with an assortment of unmounted active targets for use in custom applications.

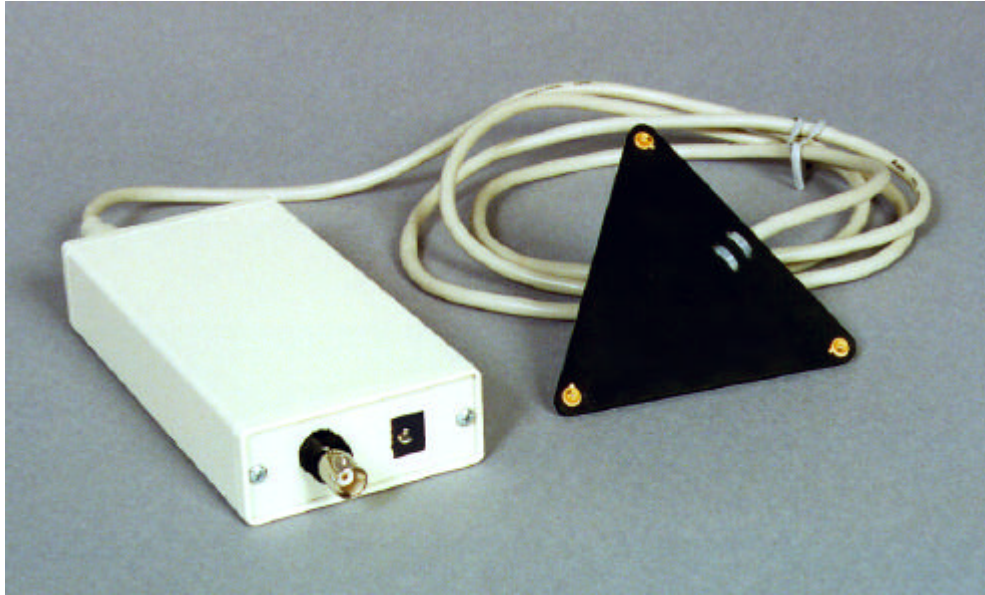

Origin Instruments Corporation  
854 Greenview Drive  
Grand Prairie, TX 75050-2438  
TEL: 972-606-8740      FAX: 972-606-8741  
email: sales@orin.com      web: <http://www.orin.com>